




H1100

Standing flowerbed

Specifications

(mm)

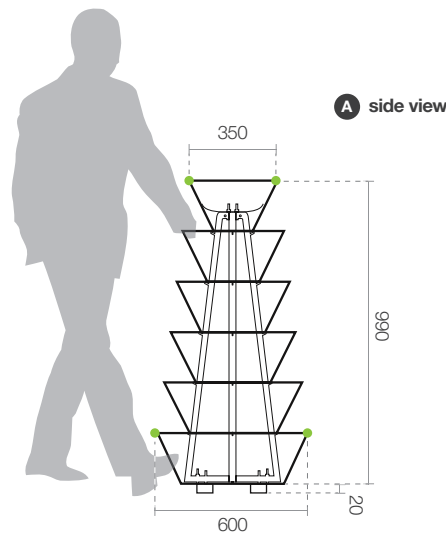

! Beware of imitations!

It is impossible to copy quality and safety. Only products branded with Terra's sign can provide the highest quality, safety and accuracy of execution.

Product protected by patent

✓ P 379058

Registered design

✓ Wp 9324-25

Made in EU

Warranty 24 months

number of rings	6	weight before planting	30 kg
capacity	125 liters	weight after planting	90 - 120 kg
total height	1010 mm	estimated amount of seedlings	32 - 50 pieces
base diameter	600 mm	warranty	24 months

Weight depending on the type of soil and its moisture

Terra's Cascading Flower Towers include a 2-year warranty program called "DOOR TO DOOR". In practice it is an extensive system of support and technical assistance, as well as an extremely efficient service guarantee. Product's flaws will promptly be fixed by our service team in any place designated or new products will be delivered.

colours (DUPLEX)



DUPLEX System

The combination of the zinc coating and a layer of structural polyester powder paint guarantee a resistant protection surface, which durability can be defined as a doubled product of the sum of these two coatings.

production method

- laser-cut rings
- rings welded in MAG / TIG technology
- all the elements are hot dip zinc coated
- powder coated rings (DUPLEX system)

safety

- rubber gasket on each rings
- no sharp edges
- heavy and stable
- high resistance to vandalism
- can be fixed to the ground




H1100


Standing flowerbed

transport
(mm)


A side view

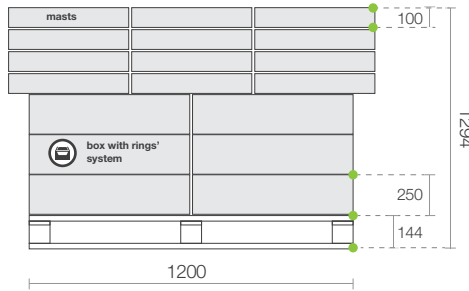

B Front view

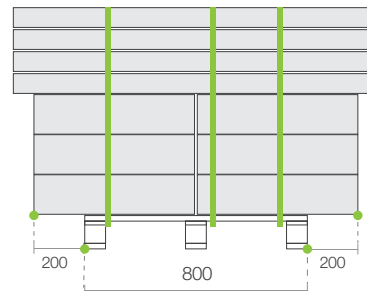

C upper view

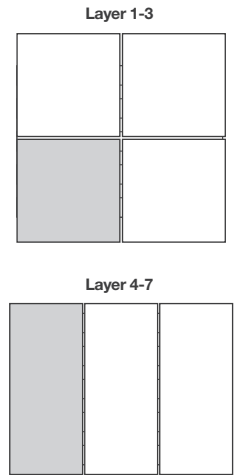

 SET PACKED IN A BOX


UP TO **12** SETS FOR A EURO PALLET

set contents


lower pan	1 item	Mast	1 item
Rings	5 items	Span	4 items
Legs	2 items	Security flat bar	1 item
Screw 8x50	9 items	gasket	9 m
Conical screw 8x50	4 items	Glue for the gasket	1 item

Additional accessories

 mobile system




● optional fixing



 watering system

TerraClickTif



number of lines in the system: 3
 type of connector: GEKA
 flow of drippers: 2 - 3 l/h
 pressure: 0,5 - 4 atm
 opening pressure of the anti-drip: 0,4 atm
 closing pressure of the anti-drip: 0,2 atm
 hose type: **new generation**
 resistant to chemicals and acidification

