


H1200

Standing flowerbed

Specifications

(mm)

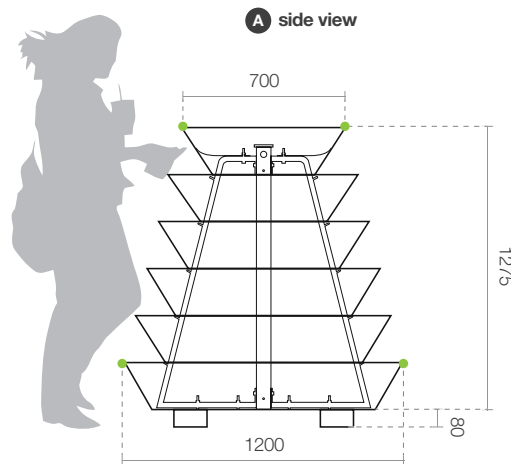

! Beware of imitations!

It is impossible to copy quality and safety. Only products branded with Terra's sign can provide the highest quality, safety and accuracy of execution.

Product protected by patent










✓ P 379058

Registered design

✓ Wp 9324-25

 Made in EU

 Warranty 24 months

Number of rings 	6	Weight before planting 	86 kg
Capacity 	668 liters	Weight after planting 	355 - 660 kg 
Total height 	1355 mm	Estimated amount of seedlings 	72 - 90 pieces
Base diameter 	1200 mm	Warranty 	24 months

 Weight depending on the type of soil and its moisture

Terra's Cascading Flower Towers include a 2-year warranty program called "DOOR TO DOOR". In practice it is an extensive system of support and technical assistance, as well as an extremely efficient service guarantee. Product's flaws will promptly be fixed by our service team in any place designated or new products will be delivered.

Colours (DUPLEX)



DUPLEX System

The combination of the zinc coating and a layer of structural polyester powder paint guarantee a resistant protection surface, which durability can be defined as a doubled product of the sum of these two coatings.

Production method

- laser-cut rings
- rings welded in MAG / TIG technology
- all the elements are hot dip zinc coated
- powder coated rings (DUPLEX system)

Safety


- rubber gasket on each rings
- no sharp edges
- heavy and stable
- high resistance to vandalism
- can be fixed to the ground



H1200

Standing flowerbed

Transport (mm)


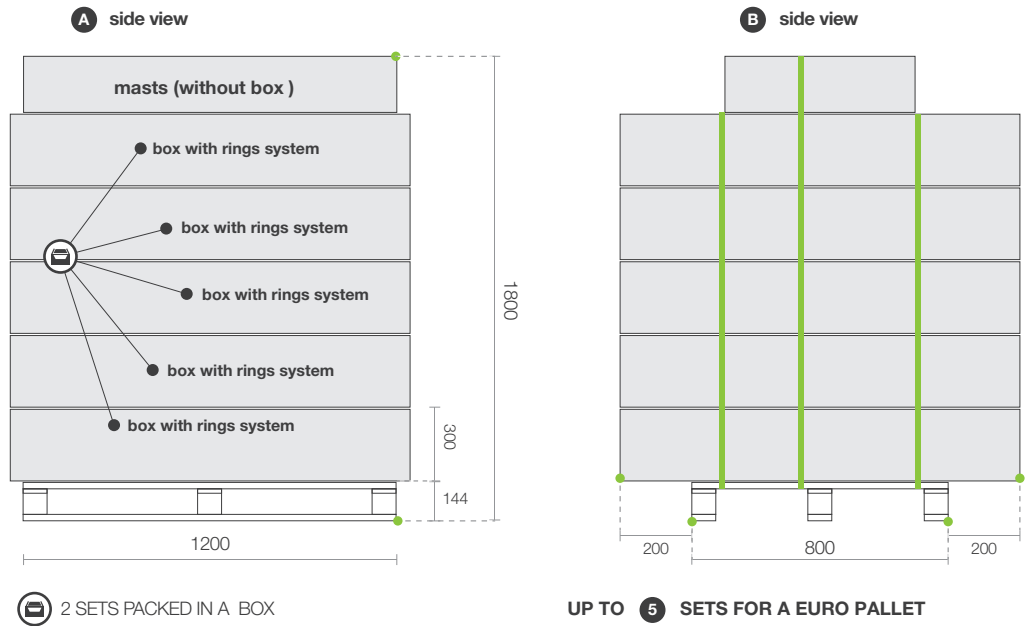


Set contents



Lower pan with legs	1 item	Mast (profile 60x60 mm)	1 item
Rings	5 items	Span	4 items
Screw 10x50	10 items	Security flat bar	2 items
Screw 10x90	4 items	Gasket	18 m
		Glue for the gasket	2 items

Additional accessories


anti-theft system



transport module



watering system TerraClick Tif



number of lines in the system: 3

type of connector: GEKA

flow of drippers: 2 - 3 l/h

pressure: 0,5 - 4 atm

opening pressure of the anti-drip: 0,4 atm

closing pressure of the anti-drip: 0,2 atm

type of hose: **new generation**
resistant to chemicals and acidification

