


H_{1/2}1200

Standing flowerbed

Specifications

(mm)

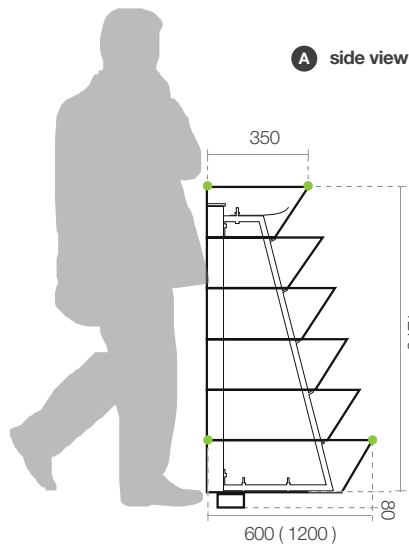

A upper view



! Beware of imitations!

It is impossible to copy quality and safety. Only products branded with Terra's sign can provide the highest quality, safety and accuracy of execution.

Product protected by patent

✓ P 379058


Registered design

✓ Wp 9324-25

 Made in EU

 Warranty 24 months

Number of rings	6
Capacity	314 liters
Total height	1355 mm
Base diameter	1/2 1200 mm

Weight before planting	60 kg
Weight after planting	180 - 300 kg 
Estimated amount of seedlings	40 - 50 pieces
Warranty	24 months

 Weight depending on the type of soil and its moisture

Terra's Cascading Flower Towers include a 2-year warranty program called "DOOR TO DOOR". In practice it is an extensive system of support and technical assistance, as well as an extremely efficient service guarantee. Product's flaws will promptly be fixed by our service team in any place designated or new products will be delivered.

Colours (DUPLEX)



DUPLEX System

The combination of the zinc coating and a layer of structural polyester powder paint guarantee a resistant protection surface, which durability can be defined as a doubled product of the sum of these two coatings.

Production method

- laser-cut rings
- rings welded in MAG / TIG technology
- all the elements are hot dip zinc coated
- powder coated rings (DUPLEX system)

Safety


- rubber gasket on each rings
- no sharp edges
- heavy and stable
- high resistance to vandalism
- can be fixed to the ground



H_{1/2}1200

Standing flowerbed

Transport (mm)


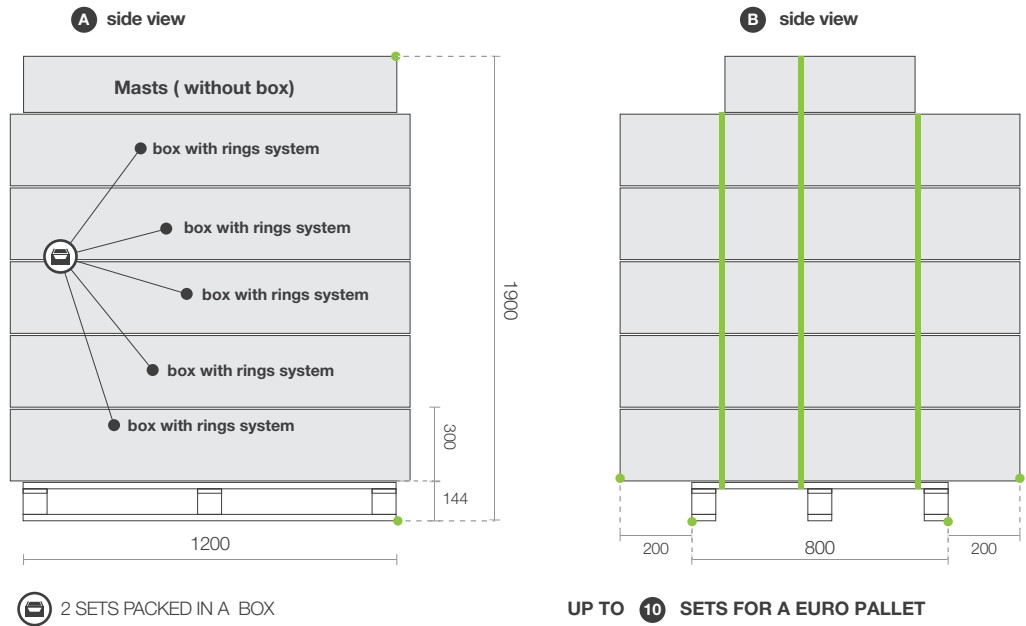


Set content



Lower pan with legs	1 item	Mast (profile 60x30 mm)	1 item
Half-rings	5 items	Span	3 items
Conical screw 8x50	2 items	Security flat bar	2 items
Screw 10x90	2 items	Gasket	9 m
Screw 6x20	4 items	Glue for the gasket	1 item
Screw 10x50	8 items		

Additional accessories


anti-theft system



transport module



watering system TerraClick Tif

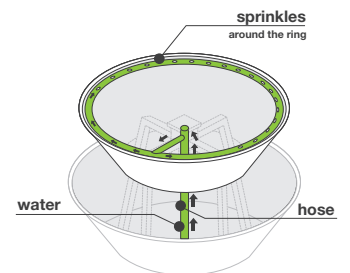

number of lines in the system: 3
 type of connector: GEKA
 flow of drippers: 2 - 3 l/h
 pressure: 0,5 - 4 atm
 opening pressure of the anti-drip: 0,4 atm
 closing pressure of the anti-drip: 0,2 atm
 type of hose: **new generation**
 resistant to chemicals and acidification

