




H700

Standing flowerbed

Specification

(mm)

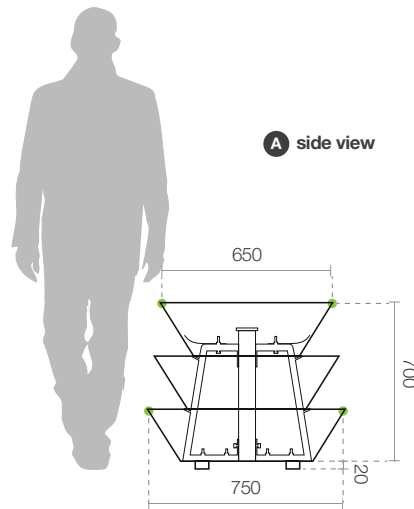

! Beware of imitations!

It is impossible to copy quality and safety. Only products branded with Terra's sign can provide the highest quality, safety and accuracy of execution.

Product protected by patent

▼ P 379058

Registered design

▼ Wp 9324-25

Made in EU

Warranty 24 months

Number of rings	3	Weight before planting	35 kg
Capacity	167 liters	Weight after planting	105 - 160 kg
Total height	720 mm	Estimated amount of seedlings	30 - 40 pieces
Base diameter	750 mm	Warranty	24 months

Weight depending on the type of soil and its moisture

Terra's Cascading Flower Towers include a 2-year warranty program called "DOOR TO DOOR". In practice it is an extensive system of support and technical assistance, as well as an extremely efficient service guarantee. Product's flaws will promptly be fixed by our service team in any place designated or new products will be delivered.

Colours (DUPLEX)



DUPLEX System

The combination of the zinc coating and a layer of structural polyester powder paint guarantee a resistant protection surface, which durability can be defined as a doubled product of the sum of these two coatings.

Production method

- laser-cut rings
- rings welded in MAG / TIG technology
- all the elements are hot dip zinc coated
- powder coated rings (DUPLEX system)

Safety


- rubber gasket on each rings
- no sharp edges
- heavy and stable
- high resistance to vandalism
- can be fixed to the ground



H700

Standing flowerbed

Transport (mm)

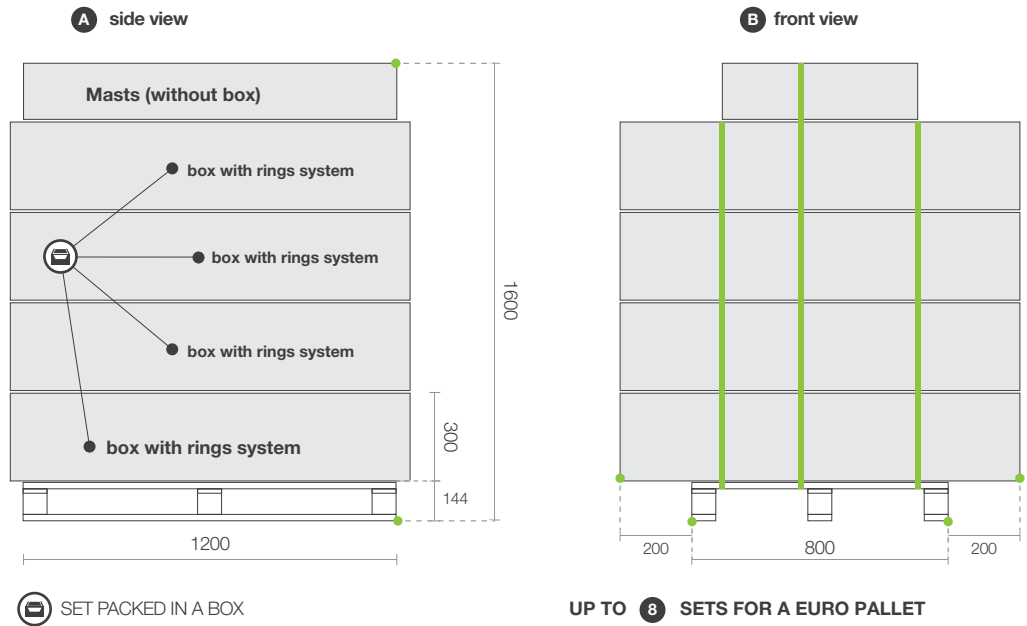


Set content

Lower pan	1 item	Mast	1 items
Rings	2 items	Span	4 items
Legs	2 items	Security flat bar	2 items
Screw 10x50	10 items	Gasket	9 m
Screw 10x90	4 items	Glue for the gasket	1 item
Conical screw 8x50	4 items		

Additional accessories

 anti-theft system




A




side view

B



upper view


 mobile system



Optional fixing



 transport module



A



front view


B



side view

 watering system

TerraClick Tif



number of lines in the system: 2
 type of connector: GEKA
 flow of drippers: 2 - 3 l/h
 pressure: 0,5 - 4 atm
 opening pressure of the anti-drip: 0,4 atm
 closing pressure of the anti-drip: 0,2 atm
 hose type: **new generation**
 resistant to chemicals and acidification

