


H1100

Standing Flower Tower

Specification

(mm)

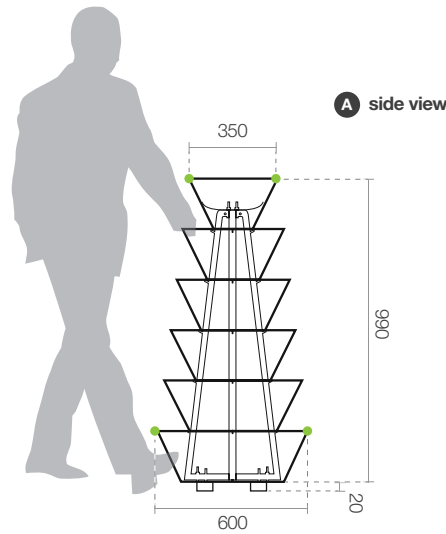

! Beware of imitations!

It is impossible to copy quality and safety. Only products branded with Terra's sign can provide the highest quality, safety and accuracy of execution.

Product protected by patent










✓ P 379058

Registered design

✓ Wp 9324-25

 Made in EU

 36 month warranty

number of rings 	6	weight before planting 	30 kg
capacity 	125 l	weight after planting 	90 - 120 kg 
total height 	1010 mm	estimated amount of seedlings 	32 - 50 pieces
base diameter 	600 mm	warranty 	36 months

 Weight depending on the type of soil and its moisture

Terra Cascading Flower Towers include a 3-year warranty program called "DOOR TO DOOR". In practice it is an extensive system of support and technical assistance, as well as an extremely efficient service guarantee. Product's flaws will promptly be fixed by our service team in any place designated or new products will be delivered.

colours (DUPLEX)



DUPLEX System

The combination of a galvanized layer and a polyester powder coat gives an extraordinary resistance. The top coat of paint, which supposed to be a decoration, becomes an additional anticorrosive layer.

production method

- laser-cut rings
- MAG / TIG welded rings
- hot dip galvanized
- powder coated rings (DUPLEX system)

safety

- rubber gasket on each ring
- no sharp edges
- heavy and stable
- high resistance to vandalism
- can be fixed to the ground




H1100


Standing Flower Tower

transport
(mm)


A side view

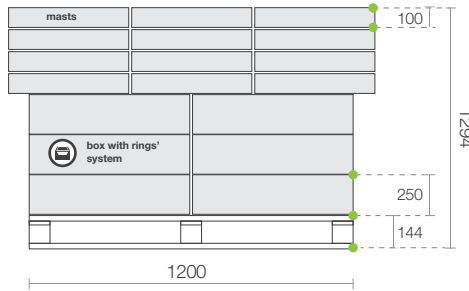

B Front view

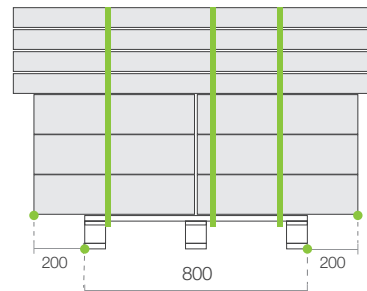

C upper view

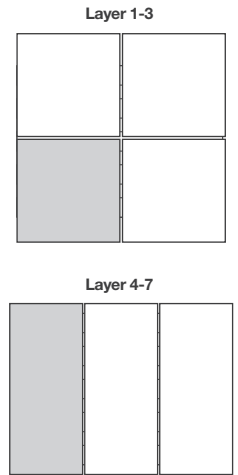

 SET PACKED IN A BOX


UP TO **12** SETS FOR A EURO PALLET

set contents


lower pan	1 item	Mast	1 item
Rings	5 items	Span	4 items
Legs	2 items	Security flat bar	1 item
Screw 8x50	9 items	gasket	9 m
Conical screw 8x50	4 items	Glue for the gasket	1 item

Additional accessories

 mobile system




● optional fixing



 watering system

TerraClick Tif



number of lines in the system: 3
 type of connector: GEKA
 flow of drippers: 2 – 3 l/h
 pressure: 0,5 - 4 atm
 opening pressure of the anti-drip: 0,4 atm
 closing pressure of the anti-drip: 0,2 atm
 hose type: **new generation**
 resistant to chemicals and acidification

